


FIGURE 11 TO PART 223—MODIFIED FLOUNDER TED

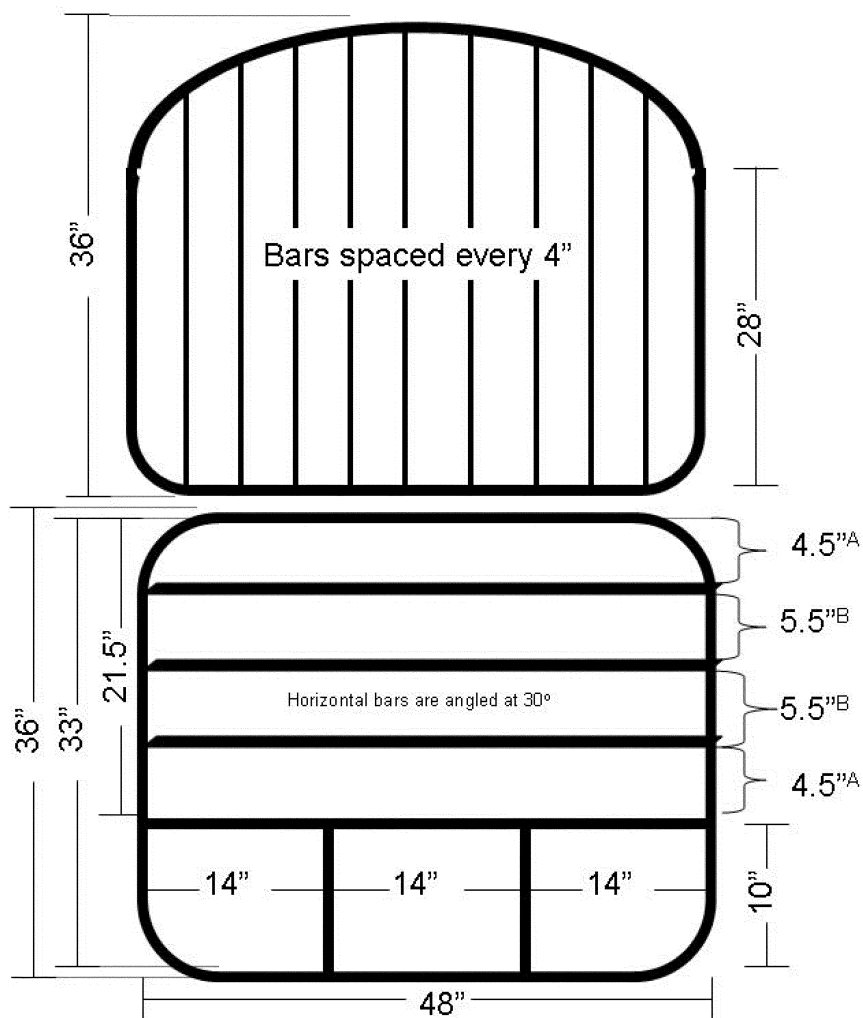

All pipe must be a minimum of 1.25" O.D.; horizontal flat bars shall be a minimum of 1.5" x 0.375"; vertical flat bars shall be a minimum of 1.25" x 0.375"

<sup>A</sup> – Space between edge of round bar and the leading edge of the adjacent bar is 4.5"

<sup>B</sup> – Space between leading edge of one bar and the leading edge of the adjacent bar is 5.5"

FIGURE 11 TO PART 223 -- MODIFIED FLOUNDER TED

[77 FR 29910, May 21, 2012]